

# CUSTOM CONNECTORS

Irizar Forge team can accommodate any forged connector to the specific lifting, rigging or mooring operation the market is ready to operate up to 1.500t, from safety, design, material strength and certification point of view.

- WLL: from 155t to 1.500t.
- Y Link, H Link, Twin Plate and Double Pin Connector forged and heat treated.
- Material: carbon steel, alloy and super alloy. Most regular super alloy steel (R4).
- Coating Protection: upon request.
- General Tolerances: +/-5% forged parts and machined parts +/-1%.
- Safety Factor: min. 4:1.
- Load test requested and recommended. ILO-3, FAT or Breaking Test available upon request.
- Certificate: EN10204-3.1. For 3.2, Mooring Accessory Cert with ABS and DNV upon request.


## Y Links



## H Links



## Twin plate

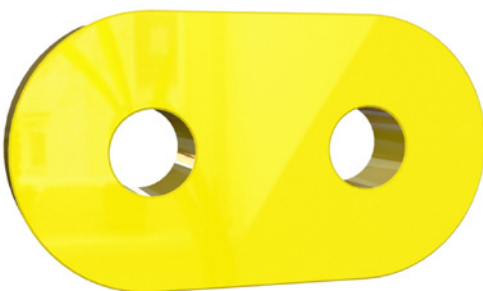

## Double Pin Connector

