


FORGED ROV HOOKS

CUSTOMIZATION
UPON REQUEST

Sling defender ROV eye hook

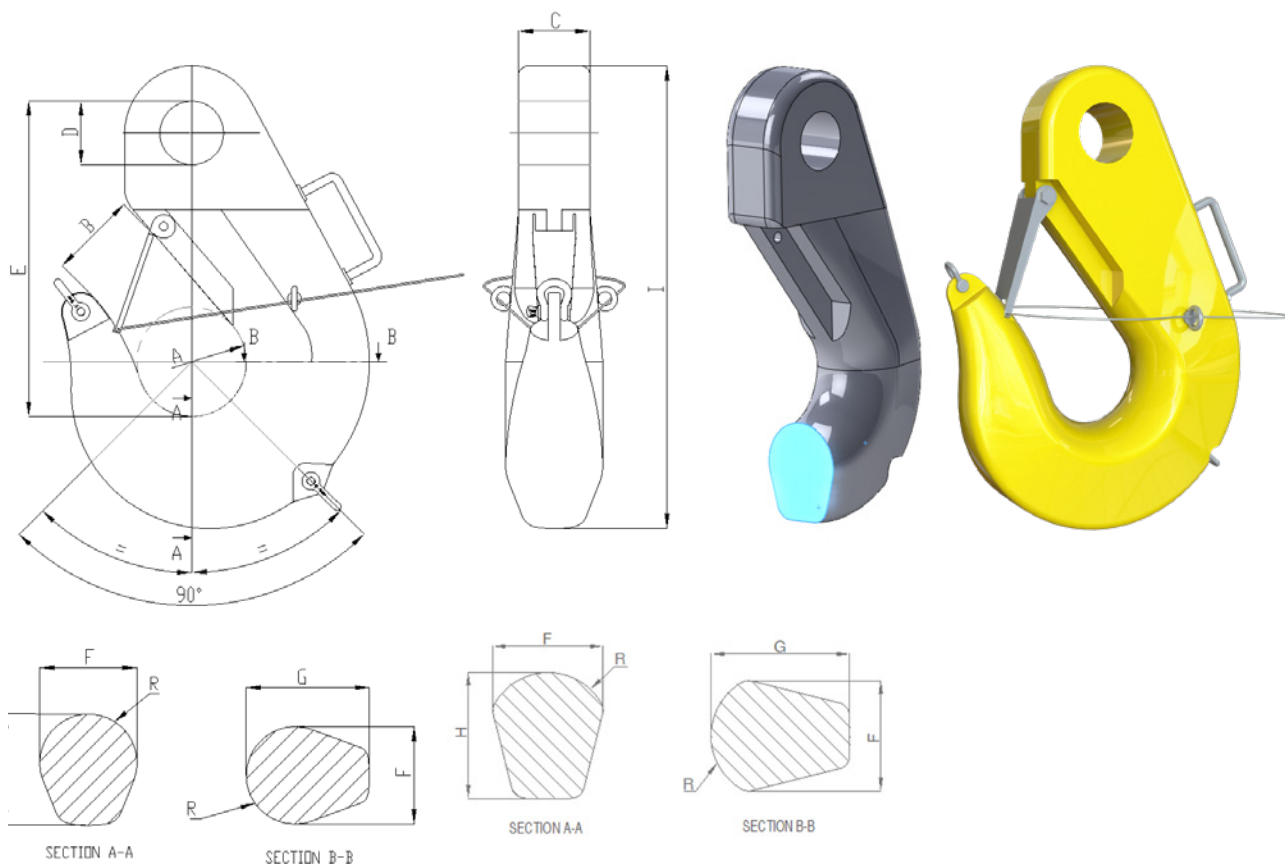

- WLL: from 50t to 1.000t.
- Hook forged and heat treated.
Fully bended with 100% grain orienting.
- Material: carbon, alloys and super alloys.
Most regular: super alloy steel (R4).
- Surface Protection & Coatings: upon request.
- Safety Factor: min. 4:1.
- Load Test: requested / recommended. ILO-3, FAT or Breaking Test available upon request.
- Certificate: EN10204-3.1. For 3.2, Mooring Accessory Cert with ABS and DNV upon request.

FORGED ROV HOOKS SLING DEFENDER ROV EYE HOOK												
Overall dimensions (mm)											Weight	
WLL (t)	MBL (t)	A	B	C	D	E	F	R	G	H	I	kg
50	200	112	90	80	75	390	100	55	125	115	555	65
63	250	125	100	100	80	425	112	60	140	125	605	88
80	320	140	112	100	87	465	125	60	160	145	670	112
100	400	160	125	130	100	530	140	80	180	165	760	160
120	480	180	140	130	100	560	160	80	200	185	815	220
150	600	200	160	140	114	590	180	90	224	205	865	305
200	800	224	180	150	137	680	200	110	250	225	985	455
250	1000	250	200	170	147	750	224	125	280	250	1090	605
300	1200	280	224	190	158	865	250	140	315	285	1250	845
400	1600	315	250	205	184	910	280	170	355	320	1335	1180
500	2000	355	280	230	194	985	315	180	400	360	1455	1510
600	2400	400	315	255	215	1035	355	190	450	400	1555	2050
800	3200	450	355	280	240	1180	400	220	500	455	1775	3090
1000	4000	500	400	320	280	1340	450	240	560	510	2010	4380

WLL working load limit using R4 material.
Forging tolerances +/-5%.
Eye dimensions (C,D) can be modified.